




OSSO FACTORY

ADAPTADORES
SOLDABLES
CETOP

WELD ON
CETOP
ADAPTERS

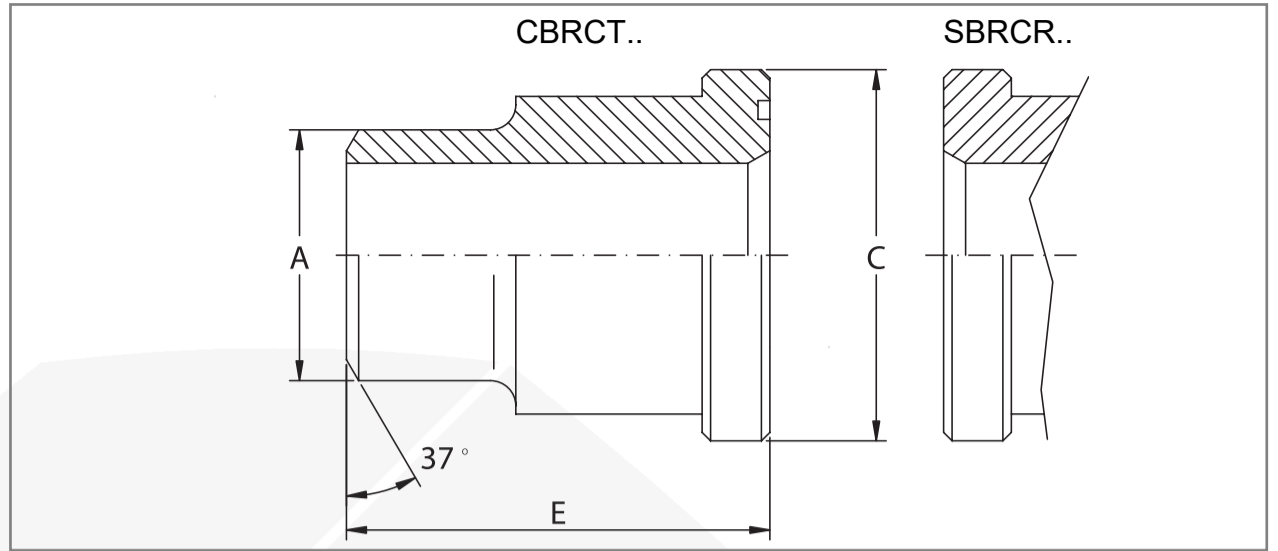

Presion maxima/ maximum pressure Kg/cm ²	Medida/Size	Tipo/Type	Dimensiones/ Dimensions			O-ring
			A	C	E	
SERIE 250						
250	3/4"	BRCT-250-WN-1212	28	38,1	35	2-214
250	1"	BRCT-250-WN-1616	34	44,4	40	2-219
250	1"1/4	BRCT-250-WN-2020	42,8	50,8	45	2-222
250	1"1/2	BRCT-250-WN-2424	48,6	60,3	50	2-225
250	2"	BRCT-250-WN-3232	61	71,4	60	2-228
SERIE 400						
400	3/4"	BRCT-250-WN-1212	28	39,5	45	2-214
400	1"	BRCT-250-WN-1616	34	47,6	50	2-219
400	1"1/4	BRCT-250-WN-2020	42,8	54,0	55	2-222
400	1"1/2	BRCT-250-WN-2424	48,6	63,5	60	2-225
400	2"	BRCT-250-WN-3232	61	79,4	70	2-228

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Adaptador con ranura para junta tórica Adapter with o-ring groove	CBRCT..	CIBRCT..
Adaptador sin ranura para junta tórica Adapter without o-ring groove	SBRCT..	SIBRCT..