




OSSO FACTORY

ADAPTADORES  
LARGOS ROSCADOS  
BSP CON DOBLE  
ASIENTO DE O-RING

BSP THREADED  
LONG ADAPTERS  
WITH DOUBLE  
O-RING SEAT

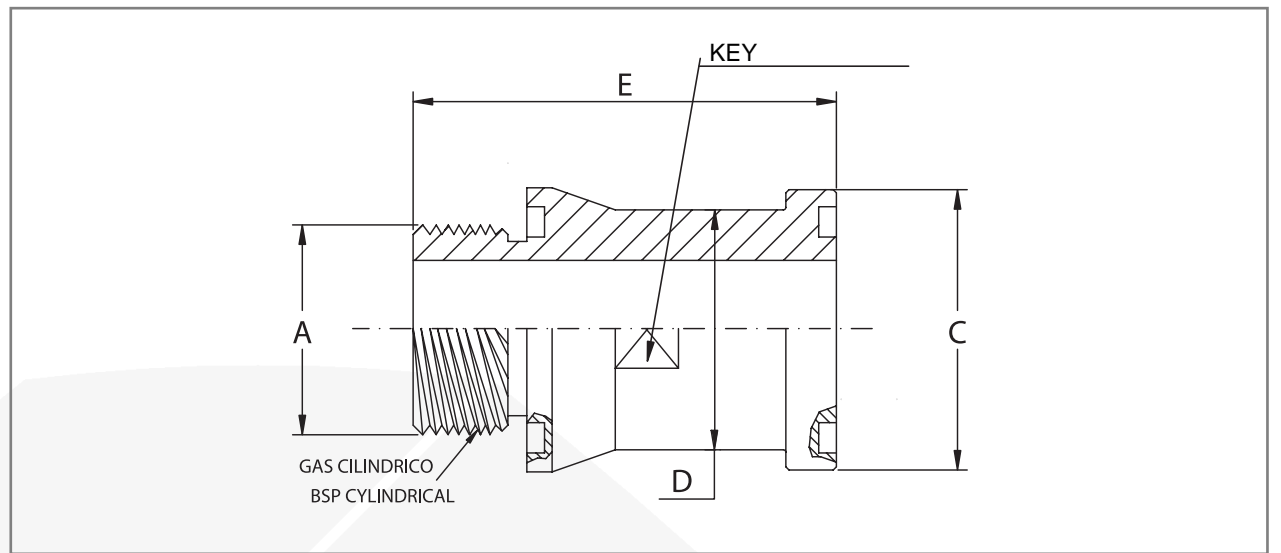

| Presion maxima/<br>maximum pressure<br>Kg/cm <sup>2</sup> | Medida/Size | Tipo/Type           | Dimensiones/ Dimensions |      |    |     | O-ring |
|---|-------------|---------------------|-------------------------|------|----|-----|--------|
|   |             |                     | A                       | C    | D  | E   |        |
| <b>SERIE 3000</b>   |             |                     |                         |      |    |     |        |
| 345   | 3/4"        | BRL-3000-RMBSP-1212 | 3/4"                    | 38,1 | 32 | 116 | 2-214  |
| 345   | 1"          | BRL-3000-RMBSP-1616 | 1"                      | 44,4 | 38 | 118 | 2-219  |
| 276   | 1"1/4       | BRL-3000-RMBSP-2020 | 1"1/4                   | 50,8 | 43 | 119 | 2-222  |
| 207   | 1"1/2       | BRL-3000-RMBSP-2424 | 1"1/2                   | 60,3 | 49 | 122 | 2-225  |
| 207   | 2"          | BRL-3000-RMBSP-3232 | 2"                      | 71,4 | 61 | 122 | 2-228  |
| <b>SERIE 6000</b>   |             |                     |                         |      |    |     |        |
| 414   | 3/4"        | BRL-6000-RMBSP-1212 | 3/4"                    | 41,3 | 32 | 117 | 2-214  |
| 414   | 1"          | BRL-6000-RMBSP-1616 | 1"                      | 47,6 | 38 | 118 | 2-219  |
| 414   | 1"1/4       | BRL-6000-RMBSP-2020 | 1"1/4                   | 54,0 | 44 | 119 | 2-222  |
| 414   | 1"1/2       | BRL-6000-RMBSP-2424 | 1"1/2                   | 63,5 | 51 | 122 | 2-225  |
| 414   | 2"          | BRL-6000-RMBSP-3232 | 2"                      | 79,4 | 67 | 122 | 2-228  |

| DESIGNACIÓN POR PEDIDO<br>DESIGNATION FOR ORDER   | MATERIAL  |           |
|---|-----------|-----------|
|   | 1045/1020 | AISI 316L |
| Adaptador cilíndrico BSP roscado con doble junta tórica<br>BSP cylindrical adapter threaded with double o-ring seat | BRL..     | IBRL..    |
|   |           |           |
|   |           |           |